

Shock Qualification


MIL-S-901E

Configuration

Each Fan Tray unit contains four (4) individually controlled fans with dual pole circuit breakers and one master control circuit breaker. Each fan control switch and master control switch include a power indicating LED. Fan tray unit is fully wired and includes C10 power entry connector and V-Lock power cord. Fans utilize Molex quick disconnects for easy replacement.

Installation

Fan tray unit fits any standard 19-inch rack with EIA-310 mounting rails. Standard installation kits include 26-Inch deep (PN 8145-405D-1) and 30-Inch deep (PN 814-405D-2). Non-standard installation kits available upon request.

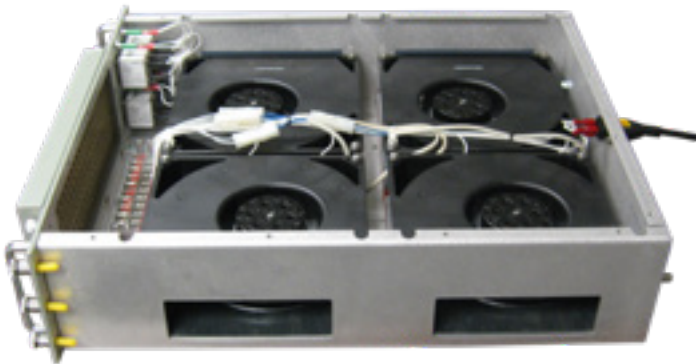

Air Flow Capacity

130 CFM per fan / 520 CFM per tray. Front air filter is easily removed for cleaning.

RF Protection

Includes EMI-RFI air filter

Dimensions / Weight

Width - Front Panel - 19.00-Inches

Width - Tray Body - 17.80-Inches

Depth - 21.86-Inches

Height - 3U (5.25-Inches)

Weight - 31.0 lbs

Electrical Rating

Fan Tray rated at 115 VAC, 4 amps; individual fans rated at 115 VAC / 1 amp each